


## General description

Complete solution for the control of a hotel room. It has outputs that allow you to control everything from lighting regulation, LED and/or conventional lighting on/off, fan coil, solenoid valves to a total on/off of the room. It also has inputs for the control and management of all outputs, as well as inputs for a card reader, technical alarm probes, and door and window magnetic detectors.

## Technical information

<b>Power supply</b>	230 Vac
<b>Consumption</b>	30 mA.
<b>Mounting / size</b>	DIN rail / 12 module
<b>Ambient temperatura range</b>	Operating: -10° C a 55° C Storage: -30° C a 60° C Transport: -30° C a 60° C
<b>Regulation</b>	Compliant with low voltage and electromagnetic compatibility directives. EN 50090-2-2 / UNE-EN 61000-6-3:2007 / UNE-EN 61000-6-1:2007 / UNE-EN 61010-1

## Installation

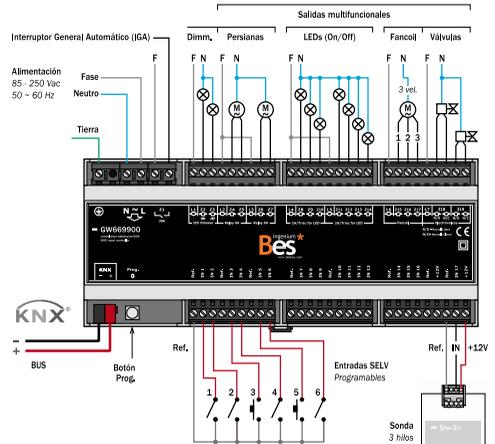

## Remarks

Connect low voltage lines (KNX bus and inputs) in separate conduits from 230 Vac lines and outputs, to ensure that there is sufficient insulation and to avoid interference.

Never connect supply voltages (230 Vac) or other external voltages to any point on the KNX bus or the inputs.

## QR code

